


KEEP A CLOSER WATCH
ON YOUR SURROUNDINGS
WITH A WIRELESS CAMERA SYSTEM

PRO-VIEW
Professional Series

AVAILABLE AT:

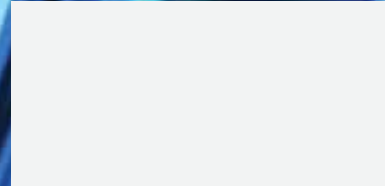

CAMERA: COLOR CMOS CAMERA
IMAGE COLOR CLARITY: IR CUT FILTER
FIELD OF VIEW: 120°
WATERPROOF: IP69K
PICTURE ELEMENTS: PAL: 960(H) X 480(V), NTSC: 960(H) X 480(V)
LENS FURNISHED: BOARD LENS 2.8MM
POWER SUPPLY: DC11-32V
WHITE BALANCE: AUTOMATIC
ELECTRONIC SHUTTER CONTROL: AUTOMATIC
TRANSMISSION POWER: 18 DBM
OPERATING TEMPERATURE: -20°C -- 70°C STORAGE TEMPERATURE: -30°C -- 80°C



Part Number

CAM175-W

**Reception Distance between
Camera(s) and a Monitor: Up to 150'**

Note: reception range may be less if
obstacles or interference exist.
(examples: metal or concrete buildings;
cell or microwave interference).

PAIRS WITH ONE TO TWO CAMERAS
DISPLAY DEVICE: COLOR TFT-LCD
SIZE: 7" DIGITAL SCREEN
OPERATION FREQUENCY: 2400-2483.5 MHZ
RESOLUTION: 800 X (RGB) X 480
VIEW ANGLE (LR/UD): L/R: 70/70 U/D: 50/70
RESPONSE TIME(MS): 25
OPERATION VOLTAGE RANGE SUPPLY: DC8V-32V (5W MAX)
DIMENSION (LXWXT): 185 X 122 X 28 (MM)
TRANSMISSION POWER: 18DBM WITH POWER CONTROL
OPERATING TEMPERATURE: -20°C--60°C STORAGE TEMPERATURE: -30°--80°C



Part Number

M100-W

PAIRS WITH ONE TO FOUR CAMERAS
DISPLAY DEVICE: COLOR TFT-LCD
SIZE: 7" DIGITAL SCREEN
OPERATION FREQUENCY: 2400-2483.5 MHZ
RESOLUTION: 800 X (RGB) X 480
VIEW ANGLE (LR/UD): L/R: 70/70 U/D: 50/70
RESPONSE TIME(MS): 25
OPERATION VOLTAGE RANGE SUPPLY: DC8V-32V (5W MAX)
DIMENSION (LXWXT): 185 X 122 X 28 (MM)
TRANSMISSION POWER: 18DBM WITH POWER CONTROL
OPERATING TEMPERATURE: -20°C--60°C STORAGE TEMPERATURE: -30°C--80°C



Part Number

M400-W