


Wheel-End Seals

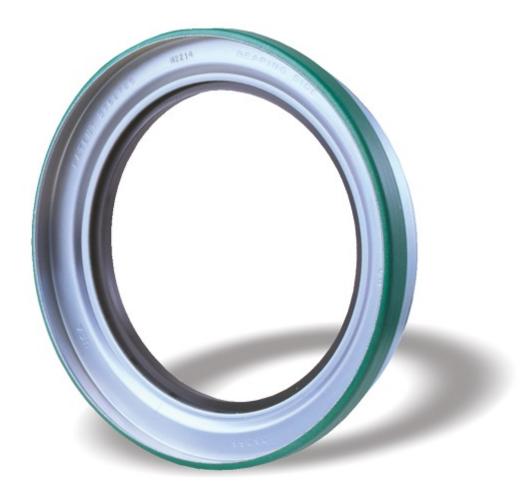

Proven as a standard in the heavy duty industry, SKF Scotseal units are available in a range of designs suited to the varying customer application requirements.

The range begins with the SKF Scotseal Classic for normal severity.

With its ability to lower running friction and provide improved contamination exclusion, the SKF Scotseal **X-Treme** is an ideal solution for fleets looking for maximum uptime, lowest cost per mile and the best ROI seal.

All use a fully enclosed cassette design (unitized design) with specially developed elastomer materials and multiple sealing lip geometries to provide excellent life and reliability in the operating conditions they are designed for.

SKF Vehicle Aftermarket (https://vehicleaftermarket.skf.com/us/en)

New! Scotseal X-Treme Flyer

New! Scotseal X-Treme Datasheet







Product Highlights

Unitized design (seal and wear sleeve supplied as a non-separable unit)

Enhanced dirt exclusion

Specially formulated elastomeric materials, compatible with mineral and synthetic lubricants

Wide temperature ranges

Long service life - increased reliability

Top Movers

| Item Number | Part Description | Attribute 1 |
|-------------|--------------------------------|---------------------------------------|
| CHR 47691 | SCOTSEAL PLUS | 4.750x6.308x1.035 ABS |
| CHR 47697 | OIL SEAL | 4.766 inId X6.316 inOd X 1.125 inWide |
| CHR 35058 | SEAL-OIL,FR STEER,SCOTSEAL PLU | 3.5 inId X 4.854 inOd X .903 inWide |
| CHR 35066 | SEAL- OIL,FR STEER,SCOTSEAL CL | 3.5 inId X 4.847 inOd X .904 inWide |
| CHR 46305 | SEAL | 4.625 inId X6.006 inOD X 1.063 inWide |
| CHR 46300 | SEAL-OIL,FR STEER,SCOTSEAL PLU | 4.625 inId X 6.014 inOd X .912 inWide |
| CHR 42627 | SCOTSEAL | 4.25 inId X 6.025 inOd X .971 inWide |
| CHR 38780 | SEAL | 3.875 inId X 5.696 inOd X .938 inWide |
| CHR 43761 | SEAL | 4.375 in x 5.9 in OD x 1 in Wide |

General Product Information

Scotseal X-Treme

With its ability to lower running friction and provide improved contamination exclusion, the Scotseal X-Treme is an ideal solution for fleets looking for maximum uptime, lowest cost per mile and the best ROI seal.

The Scotseal X-Treme wheel-end seal offers new design features that include optimized primary and axial lip profiles, a new metal unitizer geometry and the use of an upgraded HNBR lip material which enhances the performance of SKF's unique "wave" lip design. Collectively, SKF says these features improve pumping so it runs 25 percent to 30 percent cooler and provides 50 percent less torque, all contributing to improved fuel economy.

Scotseal Classic

The Scotseal Classic is designed to handle a range of road and driving conditions. To extend service life, the three-lip sealing element contains a pre-lubed, spring-loaded primary sealing lip, a dirt exclusion lip, and an outer bumper lip. A Bore Tite® coating ensures a better seal than a metal-to-metal press fit.

Warranty Information

Scotseal Classic: 1 year / 100,000 miles

Scotseal X-Treme: 5 year / 500,000 miles

Last updated: Thursday, 22 February 2024 02:26 PM

∧Back to Top

Copyright © Daimler Truck North America LLC. <u>Privacy Statement, Legal Notices and Terms (https://daimler-trucksnorthamerica.com/privacy-policy)</u>.

All rights reserved. Daimler Truck North America LLC is a <u>Daimler (http://www.daimler.com/)</u> company.